



Test Report: XLN-60-12

60W Constant Voltage LED Driver

■ DESIGN VERIFY TEST

- Output Function Test
- Input Function Test
- Protection Function Test
- Control Function Test
- Component Stress Test

■ SAFETY & E.M.C. TEST

- Safety Test
- E.M.C. Test

■ RELIABILITY TEST

- ENVIRONMENT TEST


DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT |
|----|----------------------------------|---|---|-------------------------------|
| 1 | OUTPUT VOLTAGE(Max) TOLERANCE | V1: -5% ~ +5% (Max) | I/P: 230VAC O/P:100%load Ta:25°C | V1: 0.93%~ 1.0% |
| 2 | OVER/UNDERSHOOT TEST | < ±5% | I/P: 230VAC O/P:100% /0% Ta:25°C | 1.75% |
| 3 | SET UP TIME(Max) | 230VAC/ 800ms (Max) 115VAC/ 1000ms (Max) | I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta:25°C | 230VAC/ 420ms 115VAC/626ms |


INPUT=230VAC/50HZ @ FULL LOAD

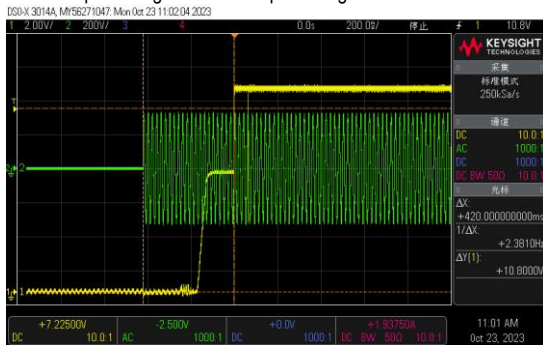CH1 : Output Voltage CH2 : AC Input Voltage



INPUT=115VAC/60HZ @ FULL LOAD

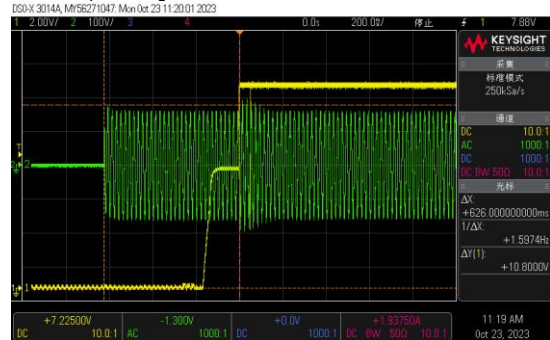
CH1 : Output Voltage



| | | | | |
|---|-----------------|--|---|--------------------------------|
| 4 | RISE TIME (Max) | 230VAC/ 180ms (Max) 115VAC/ 180ms (Max) | I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta:25°C | 230VAC/ 162ms 115VAC/162 ms |
|---|-----------------|--|---|--------------------------------|


INPUT=230VAC/50HZ @ FULL LOAD

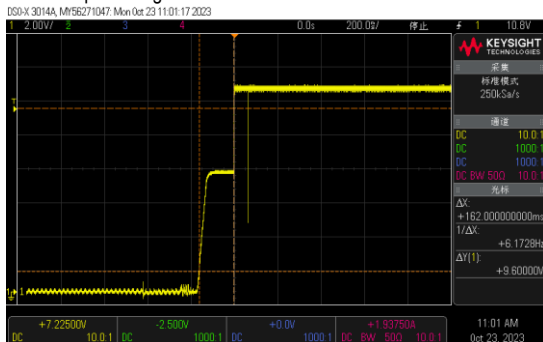CH1 : Output Voltage



INPUT=115VAC/60HZ @ FULL LOAD

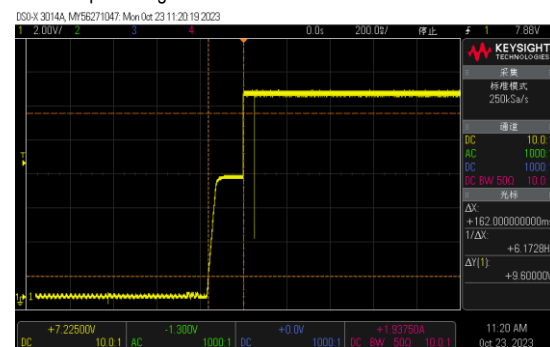
CH1 : Output Voltage




INPUT FUNCTION TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT |
|----|-----------------------|---|--|--|
| 1 | INPUT VOLTAGE RANGE | 110VAC~305 VAC 155VDC~400VDC | (1) I/P: TESTING O/P: FULL LOAD (2) I/P: DC TESTING (L: + N:-) O/P: FULL / 50% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 50% LOAD (4) I/P: LOW-LINE=141VDC HIGH-LINE=431VDC O/P: Dimming on/off 【for Dimming type】 Ta:25°C | (1) 100V~305V (2) 141Vdc~400Vdc/FULL LOAD 141Vdc~400Vdc/50% LOAD (3) 141Vdc~400Vdc/FULL LOAD 141Vdc~400Vdc/50% LOAD (4)OK |
| | | | I/P: LOW-LINE-3V=107 V HIGH-LINE+10V=315 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE) | TEST: OK |
| 2 | INPUT FREQUENCY RANGE | 47HZ ~63 HZ NO DAMAGE | I/P: 90 VAC ~305VAC O/P:FULL~MIN LOAD Ta:25°C | OK |
| 3 | INPUT CURRENT (TYP) | 277VAC/ 0.30 A 230 VAC/ 0.35 A 115 VAC/ 0.75 A | I/P: 277VAC/230 VAC/115 VAC O/P:FULL LOAD Ta:25°C LEDH MODE TEST | I = 0.274 A/277VAC I = 0.316 A/ 230VAC I = 0.628 A/ 115VAC |
| 4 | POWER FACTOR(TYP) | 0.95/230 VAC FULL LOAD 0.95/115 VAC FULL LOAD 0.9/277 VAC FULL LOAD | I/P: 230 VAC/115VAC/277VAC O/P:FULL LOAD Ta:25°C LEDH MODE TEST | PF= 0.955 /230V/100%LOAD PF= 0.991 /115V/100%LOAD PF= 0.905 /277V/100%LOAD |

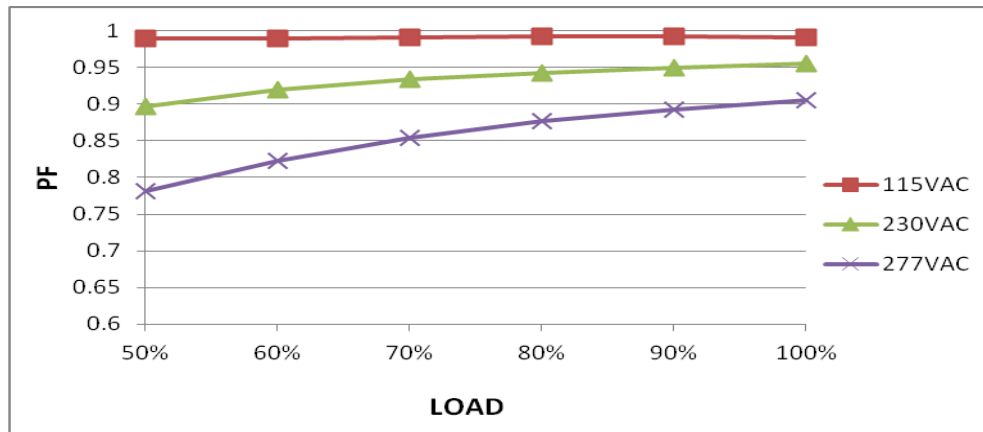P.F vs LOAD



| 5 | EFFICIENCY (TYP) | 86 % | I/P: 230 VAC O/P:FULL LOAD Ta:25°C LEDH MODE TEST | 86.05% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---------------------------|--|---|--|----------|------------|------------|------------|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|----|------|----|----|----|
| <p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>Efficiency vs Load Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC (%)</th> <th>230VAC (%)</th> <th>277VAC (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>76</td><td>70</td><td>69</td></tr> <tr><td>20%</td><td>82</td><td>78</td><td>76</td></tr> <tr><td>30%</td><td>84</td><td>82</td><td>80</td></tr> <tr><td>40%</td><td>85</td><td>84</td><td>83</td></tr> <tr><td>50%</td><td>85</td><td>85</td><td>84</td></tr> <tr><td>60%</td><td>85</td><td>85</td><td>84</td></tr> <tr><td>70%</td><td>85</td><td>85</td><td>84</td></tr> <tr><td>80%</td><td>85</td><td>85</td><td>84</td></tr> <tr><td>90%</td><td>84</td><td>85</td><td>84</td></tr> <tr><td>100%</td><td>84</td><td>86</td><td>84</td></tr> </tbody> </table> | | | | | LOAD (%) | 115VAC (%) | 230VAC (%) | 277VAC (%) | 10% | 76 | 70 | 69 | 20% | 82 | 78 | 76 | 30% | 84 | 82 | 80 | 40% | 85 | 84 | 83 | 50% | 85 | 85 | 84 | 60% | 85 | 85 | 84 | 70% | 85 | 85 | 84 | 80% | 85 | 85 | 84 | 90% | 84 | 85 | 84 | 100% | 84 | 86 | 84 |
| LOAD (%) | 115VAC (%) | 230VAC (%) | 277VAC (%) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10% | 76 | 70 | 69 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20% | 82 | 78 | 76 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30% | 84 | 82 | 80 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40% | 85 | 84 | 83 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 50% | 85 | 85 | 84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60% | 85 | 85 | 84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 70% | 85 | 85 | 84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 80% | 85 | 85 | 84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 90% | 84 | 85 | 84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100% | 84 | 86 | 84 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | INRUSH CURRENT (TYP) | 230 V/ 15 A COLD START (twidth=310us measured at 50% Ipeak) COLD START | I/P: 230 VAC O/P:FULL LOAD Ta:25°C LEDH MODE TEST | I = 12.28A/ 230VAC T50=12 us | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>INPUT=230VAC/50HZ @ FULL LOAD CH2 : AC Input Voltage CH4 : Input current (1V=1A)</p> <p>DC: +7.22500V 10.0:1 AC: +320.000V 1000:1 DC: +0.0V 1000:1 DC BW 500 10.0:1 11:51 AM Oct 23, 2023</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | LEAKAGE CURRENT | < 0.75mA / 277VAC | I/P: 277 VAC O/P:Min LOAD Ta:25°C | L-FG : 0.018mA N-FG : 0.017 mA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | TOTAL HARMONIC DISTORTION | THD < 20%(@load ≥ 60%/230VAC; @load ≥ 75%/277VAC); THD < 10%@load 100%/230VAC | I/P : 230VAC/277VAC O/P : 60% /75% /100% LOAD Ta : 25°C | THD : 9.56% 230VAC 60% THD : 11.54% 277VAC 75% THD : 8.62% 230VAC 100% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






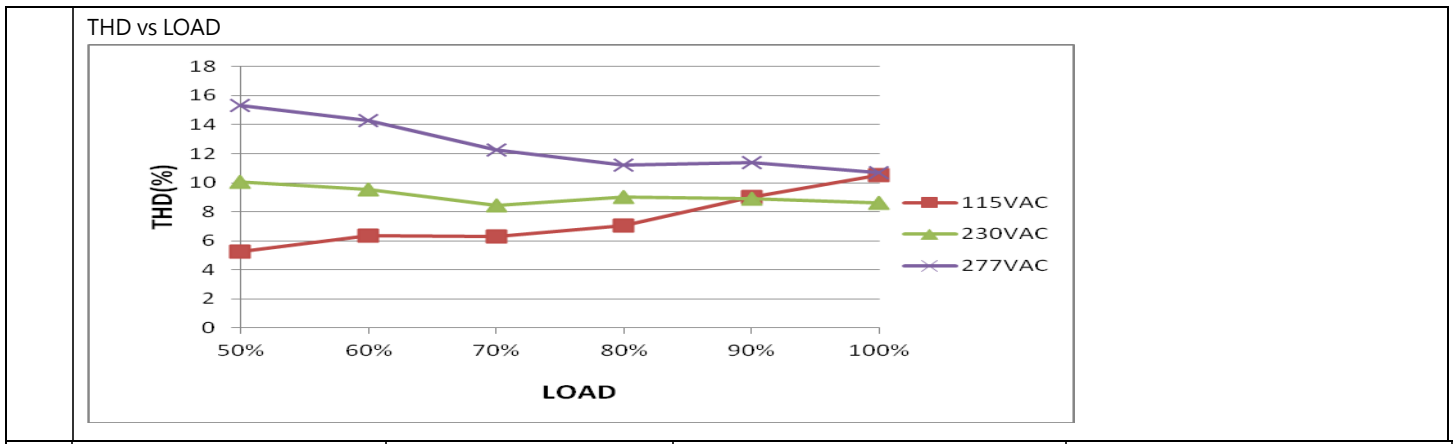




| | | | | |
|---|---------------------------|--|--|---|
| 9 | STANDBY POWER CONSUMPTION | Standby power consumption < 0.5W (Dimming OFF, only for standard version B/DA2-type) | I/P : 230VAC O/P : TESTING Ta : 25°C | 0.2626W for B-type 0.314W for DA2-type |
|---|---------------------------|--|--|---|

PROTECTION FUNCTION TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT |
|----|-----------------------------|--|--|---|
| 1 | OVER LOAD PROTECTION | 105%~ 200 % | I/P: 305VAC I/P: 230VAC I/P: 110VAC O/P: TESTING Ta: 25°C | 141.2%/ 305VAC 140.4%/ 230VAC 125.6%/110VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed. |
| 2 | OVER VOLTAGE PROTECTION | 14 V~ 17V | I/P: 305VAC I/P: 230VAC I/P: 110VAC O/P: MIN LOAD Ta: 25°C | 15.3V/ 305VAC 15.3V/ 230VAC 15.3V/ 110VAC PROTECTION TYPE : Shut down output voltage, re-power on to recover |
| 3 | OVER TEMPERATURE PROTECTION | NO DAMAGE | I/P: 305 VAC I/P: 110 VAC O/P: FULL LOAD | O.T.P. Active PROTECTION TYPE : Shut down output voltage, recovers automatically after fault condition is removed |
| 4 | SHORT PROTECTION | SHORT EVERY OUTPUT 1 HOUR NO DAMAGE | I/P: 305VAC I/P: 110 VAC O/P: FULL LOAD Ta: 25°C | NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed. |

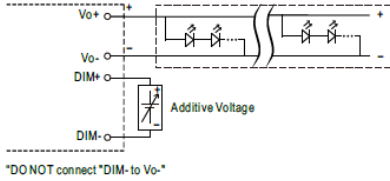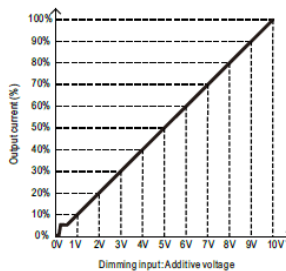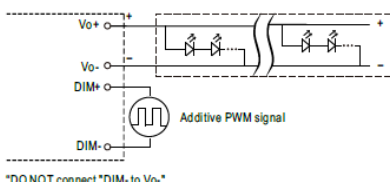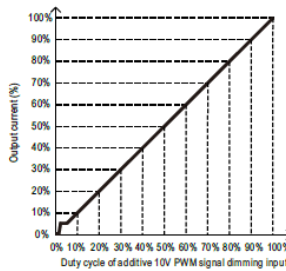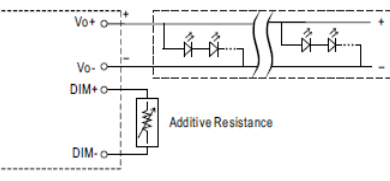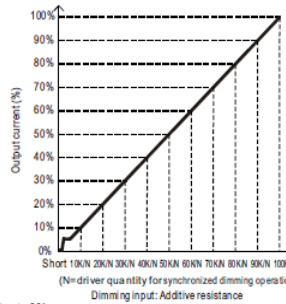CONTROL FUNCTION TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|---------------------------|---|------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----|------|------|----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------------------|----|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------------|----|----|----|----|----|----|----|----|----|----|-----|------|----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------------------|----|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|----------------|---|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------------------|----|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--|--|
| 1 | DIMMING OPERATION(B-Type) | <p>◎ B type</p> <p>※ 3 in 1 dimming function</p> <ul style="list-style-type: none"> Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-: 0~10VDC, or 10V PWM signal or resistance. Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers. Dimming source current from power supply: 100 μA (typ.) <p>◎ Applying additive 0~10VDC</p>  <p>*DO NOT connect *DIM- to Vo-*</p>  <p>◎ Applying additive 10V PWM signal (frequency range 300Hz~3KHz):</p>  <p>*DO NOT connect *DIM- to Vo-*</p>  <p>◎ Applying additive resistance: 0~100k Ω</p>  <p>*DO NOT connect *DIM- to Vo-*</p>  <p>Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < I_{out} < 8%. 2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.</p> <p>I/P : 230 VAC ; O/P : DIMMING TEST ; Ta : 25°C</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Resistance value</th> <th>Short</th> <th>10K</th> <th>20K</th> <th>30K</th> <th>40K</th> <th>50K</th> <th>60K</th> <th>70K</th> <th>80K</th> <th>90K</th> <th>100K</th> <th>OPEN</th> </tr> </thead> <tbody> <tr> <td>Output Current</td> <td>0</td> <td>0.640A</td> <td>1.110A</td> <td>1.630A</td> <td>2.090A</td> <td>2.620A</td> <td>3.130A</td> <td>3.660A</td> <td>4.180A</td> <td>4.730A</td> <td>4.950A</td> <td>4.950A</td> </tr> <tr> <td>Output Current duty</td> <td>0%</td> <td>12.80%</td> <td>22.20%</td> <td>32.60%</td> <td>41.80%</td> <td>52.40%</td> <td>62.60%</td> <td>73.20%</td> <td>83.60%</td> <td>94.60%</td> <td>99.00%</td> <td>99.00%</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Dimming value</th> <th>0V</th> <th>1V</th> <th>2V</th> <th>3V</th> <th>4V</th> <th>5V</th> <th>6V</th> <th>7V</th> <th>8V</th> <th>9V</th> <th>10V</th> <th>OPEN</th> </tr> </thead> <tbody> <tr> <td>Output Current</td> <td>0</td> <td>0.558A</td> <td>1.010A</td> <td>1.530A</td> <td>1.990A</td> <td>2.530A</td> <td>3.020A</td> <td>3.560A</td> <td>4.100A</td> <td>4.620A</td> <td>4.960A</td> <td>4.960A</td> </tr> <tr> <td>Output Current duty</td> <td>0%</td> <td>11.16%</td> <td>20.20%</td> <td>30.60%</td> <td>39.90%</td> <td>50.60%</td> <td>60.40%</td> <td>71.20%</td> <td>82.00%</td> <td>92.40%</td> <td>99.20%</td> <td>99.20%</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Duty value</th> <th>0%</th> <th>10%</th> <th>20%</th> <th>30%</th> <th>40%</th> <th>50%</th> <th>60%</th> <th>70%</th> <th>80%</th> <th>90%</th> <th>100%</th> <th>OPEN</th> </tr> </thead> <tbody> <tr> <td>Output Current</td> <td>0</td> <td>0.550A</td> <td>1.010A</td> <td>1.530A</td> <td>1.990A</td> <td>2.520A</td> <td>3.020A</td> <td>3.540A</td> <td>4.060A</td> <td>4.590A</td> <td>4.950A</td> <td>4.960A</td> </tr> <tr> <td>Output Current duty</td> <td>0%</td> <td>11.00%</td> <td>20.20%</td> <td>30.60%</td> <td>39.80%</td> <td>50.40%</td> <td>60.40%</td> <td>70.80%</td> <td>81.20%</td> <td>91.80%</td> <td>99.00%</td> <td>99.20%</td> </tr> </tbody> </table> | Resistance value | Short | 10K | 20K | 30K | 40K | 50K | 60K | 70K | 80K | 90K | 100K | OPEN | Output Current | 0 | 0.640A | 1.110A | 1.630A | 2.090A | 2.620A | 3.130A | 3.660A | 4.180A | 4.730A | 4.950A | 4.950A | Output Current duty | 0% | 12.80% | 22.20% | 32.60% | 41.80% | 52.40% | 62.60% | 73.20% | 83.60% | 94.60% | 99.00% | 99.00% | Dimming value | 0V | 1V | 2V | 3V | 4V | 5V | 6V | 7V | 8V | 9V | 10V | OPEN | Output Current | 0 | 0.558A | 1.010A | 1.530A | 1.990A | 2.530A | 3.020A | 3.560A | 4.100A | 4.620A | 4.960A | 4.960A | Output Current duty | 0% | 11.16% | 20.20% | 30.60% | 39.90% | 50.60% | 60.40% | 71.20% | 82.00% | 92.40% | 99.20% | 99.20% | Duty value | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN | Output Current | 0 | 0.550A | 1.010A | 1.530A | 1.990A | 2.520A | 3.020A | 3.540A | 4.060A | 4.590A | 4.950A | 4.960A | Output Current duty | 0% | 11.00% | 20.20% | 30.60% | 39.80% | 50.40% | 60.40% | 70.80% | 81.20% | 91.80% | 99.00% | 99.20% | | |
| Resistance value | Short | 10K | 20K | 30K | 40K | 50K | 60K | 70K | 80K | 90K | 100K | OPEN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Current | 0 | 0.640A | 1.110A | 1.630A | 2.090A | 2.620A | 3.130A | 3.660A | 4.180A | 4.730A | 4.950A | 4.950A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Current duty | 0% | 12.80% | 22.20% | 32.60% | 41.80% | 52.40% | 62.60% | 73.20% | 83.60% | 94.60% | 99.00% | 99.00% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dimming value | 0V | 1V | 2V | 3V | 4V | 5V | 6V | 7V | 8V | 9V | 10V | OPEN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Current | 0 | 0.558A | 1.010A | 1.530A | 1.990A | 2.530A | 3.020A | 3.560A | 4.100A | 4.620A | 4.960A | 4.960A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Current duty | 0% | 11.16% | 20.20% | 30.60% | 39.90% | 50.60% | 60.40% | 71.20% | 82.00% | 92.40% | 99.20% | 99.20% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Duty value | 0% | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Current | 0 | 0.550A | 1.010A | 1.530A | 1.990A | 2.520A | 3.020A | 3.540A | 4.060A | 4.590A | 4.950A | 4.960A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Current duty | 0% | 11.00% | 20.20% | 30.60% | 39.80% | 50.40% | 60.40% | 70.80% | 81.20% | 91.80% | 99.00% | 99.20% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
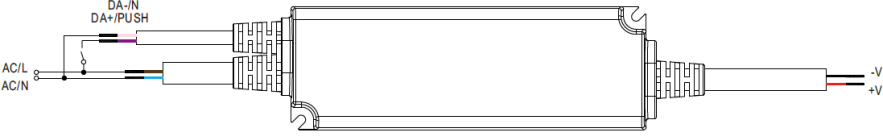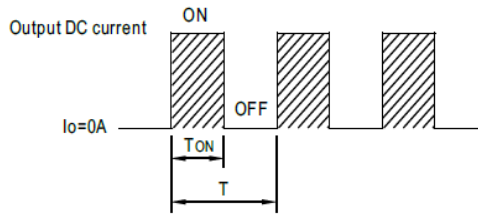
| <p>2</p> | <p>DA2 type (DALI-2 digital dimming function)</p> | <p>◎ DA2 type (DALI-2 digital dimming function)</p> <p>※ Input wiring diagram</p>  <p>※ PUSH dimming (primary side)</p> <ul style="list-style-type: none"> The factory default dimming level is at 100%. If the push action lasts less than 0.05 sec., it will not lead to a change for the status of the driver. Up to 10 drivers can perform the PUSH dimming at the same time when utilizing one common push button. The maximum length of the cable from the push button to the last driver is 20 meters. <table border="1" data-bbox="534 604 1181 716"> <thead> <tr> <th>Action</th> <th>Action duration</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>Short Push</td> <td>0.1~1s</td> <td>Turn ON-OFF the driver</td> </tr> <tr> <td>Double Click</td> <td>Click twice in 1.5s</td> <td>Set up the dimming level to 100%</td> </tr> <tr> <td>Long Push</td> <td>1.5~10s</td> <td>Every Long Push changes the dimming direction, dimming up or down</td> </tr> </tbody> </table> <p>I/P : 230 VAC O/P : DIMMING TEST Ta : 25°C TEST RESULT : OK</p> | Action | Action duration | Function | Short Push | 0.1~1s | Turn ON-OFF the driver | Double Click | Click twice in 1.5s | Set up the dimming level to 100% | Long Push | 1.5~10s | Every Long Push changes the dimming direction, dimming up or down |
|--------------|---|---|--------|-----------------|----------|------------|--------|------------------------|--------------|---------------------|----------------------------------|-----------|---------|---|
| Action | Action duration | Function | | | | | | | | | | | | |
| Short Push | 0.1~1s | Turn ON-OFF the driver | | | | | | | | | | | | |
| Double Click | Click twice in 1.5s | Set up the dimming level to 100% | | | | | | | | | | | | |
| Long Push | 1.5~10s | Every Long Push changes the dimming direction, dimming up or down | | | | | | | | | | | | |
| <p>3</p> | <p>PWM OUTPUT DIMMING PRINCIPLE</p> | <p>※ For 12V/24V/48V PWM style output dimming</p> <ul style="list-style-type: none"> Dimming is achieved by varying the duty cycle of the output current.  <p>Duty cycle(%) = $\frac{T_{ON}}{T} \times 100\%$</p> <p>Output PWM frequency : 4kHz for B-Type fixed (Typ.) 3.2kHz for DA2-Type fixed (Typ.)</p> <p>I/P : 230 VAC O/P : FULL LOAD Ta : 25°C TEST RESULT : OK</p> | | | | | | | | | | | | |

COMPONENT STRESS TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT |
|----|--|-------------------------|--|--|
| 1 | PWM Transistor (D to S) or (C to E) Peak Voltage | Q 1 Rated 800 V/11 A | AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. I/P: Low-Line -3V = 107V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C | VDS: (1) 779V (2) 799V (3) 690V (4) 682V (5) 678V (6) 706V (7) 798V VDS: (1) 475V (2) 475V (3) 471V (4) 467V (5) 475V (6) 463V (7) 418V |
| 2 | Diode Peak Voltage | Q100 Rated 93A/150V | AC ON/OFF I/P: High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C | Q100: VDS: (1) 148V (2) 149V (3) 149V (4) 148V (5) 147V (6) 149V (7) 148V (8) 147V |

| 3 | Control IC Voltage Test | <p>U1 Rated 7V~18V</p> <p>U100 Rated 6V~ 75V</p> <p>U451 Rated 1.7V-3.6V</p> | <p>AC ON/OFF I/P: High-Line +3V =308 V FOR C.V MODE TYPE O/P (1) FULL LOAD (2) Output Short (3) O.L.P (4) O.V.P (5) NO LOAD VRmin.LOW LINE (6) Dim off</p> <p>Ta:25°C</p> | <p>U1 (1) 14.7V (2) 14.7V (3) 14.7V (4) 14.7V (5) 11.0V (6) 11.0V</p> <p>U100 (1) 18.6V (2) 19.6V (3) 18.8V (4)19.0V (5) 17.6V (6) 17.2V</p> <p>U451</p> <table border="1" data-bbox="1117 907 1492 1232"> <thead> <tr> <th>FOR C.V MODE TYPE</th> <th>Level</th> <th>Ripple</th> <th>Spike</th> </tr> </thead> <tbody> <tr> <td>FULL LOAD</td> <td>3.288</td> <td>0.59%</td> <td>2.91%</td> </tr> <tr> <td>Output Short</td> <td>3.288</td> <td>0.57%</td> <td>3.55%</td> </tr> <tr> <td>O.L.P</td> <td>3.288</td> <td>0.49%</td> <td>3.55%</td> </tr> <tr> <td>O.V.P</td> <td>3.284</td> <td>0.26%</td> <td>0.94%</td> </tr> <tr> <td>NO LOAD VRmin.LOW LINE</td> <td>3.283</td> <td>0.28%</td> <td>0.64%</td> </tr> <tr> <td>DIM OFF</td> <td>3.283</td> <td>0.24%</td> <td>0.88%</td> </tr> </tbody> </table> | FOR C.V MODE TYPE | Level | Ripple | Spike | FULL LOAD | 3.288 | 0.59% | 2.91% | Output Short | 3.288 | 0.57% | 3.55% | O.L.P | 3.288 | 0.49% | 3.55% | O.V.P | 3.284 | 0.26% | 0.94% | NO LOAD VRmin.LOW LINE | 3.283 | 0.28% | 0.64% | DIM OFF | 3.283 | 0.24% | 0.88% |
|------------------------|-----------------------------|--|---|---|-------------------|-------|-----------|-----------|-----------|-----------|-----------|-----------|--------------|-----------|----------|-----------|----------|-----------|-----------|-----------|-------|-------|-------|-------|------------------------|-------|-------|-------|---------|-------|-------|-------|
| FOR C.V MODE TYPE | Level | Ripple | Spike | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FULL LOAD | 3.288 | 0.59% | 2.91% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Output Short | 3.288 | 0.57% | 3.55% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| O.L.P | 3.288 | 0.49% | 3.55% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| O.V.P | 3.284 | 0.26% | 0.94% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NO LOAD VRmin.LOW LINE | 3.283 | 0.28% | 0.64% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DIM OFF | 3.283 | 0.24% | 0.88% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | Clamp Diode Peak Voltage | D10 Rated : 1000V/1A | <p>AC ON/OFF I/P : High-Line +3V = 308 V O/P : (1) Dynamic Load 90%Duty/1KHz (2) Full load continue</p> <p>Ta : 25°C</p> | <p>(1)629V (2)637V</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | Buck Diode Peak Voltage MOS | <p>Q110 Rated : 90A/40V</p> <p>Q111 Rated : 90A/40V</p> | <p>AC ON/OFF I/P : High-Line +3V = 308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load.</p> <p>Ta:25°C</p> | <table border="0"> <tr> <td>Q110</td> <td>Q111</td> </tr> <tr> <td>(1) 34.8V</td> <td>(1) 28.8V</td> </tr> <tr> <td>(2) 31.2V</td> <td>(2) 28.4V</td> </tr> <tr> <td>(3) 31.6V</td> <td>(3) 28.4V</td> </tr> <tr> <td>(4) 30.4V</td> <td>(4) 28.4V</td> </tr> <tr> <td>(5)32.8V</td> <td>(5) 28.8V</td> </tr> <tr> <td>(6)34.0V</td> <td>(6) 28.4V</td> </tr> <tr> <td>(7) 34.0V</td> <td>(7) 27.2V</td> </tr> </table> | Q110 | Q111 | (1) 34.8V | (1) 28.8V | (2) 31.2V | (2) 28.4V | (3) 31.6V | (3) 28.4V | (4) 30.4V | (4) 28.4V | (5)32.8V | (5) 28.8V | (6)34.0V | (6) 28.4V | (7) 34.0V | (7) 27.2V | | | | | | | | | | | | |
| Q110 | Q111 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (1) 34.8V | (1) 28.8V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (2) 31.2V | (2) 28.4V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (3) 31.6V | (3) 28.4V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (4) 30.4V | (4) 28.4V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (5)32.8V | (5) 28.8V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (6)34.0V | (6) 28.4V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| (7) 34.0V | (7) 27.2V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | | | |
|---|----------------------------------|-------------------------|--|---|
| 6 | Dimming MOS Only B orDA2-type | Q200 Rated : 80A/60V | AC ON/OFF I/P : High-Line +3V = 308 V O/P: (1) FULL Load (2) FULL Load continue (3) Output Short (4) DIM OFF Ta:25°C | (1) 80.4A (2) 5.22A (3) 79A (4) 0A |
|---|----------------------------------|-------------------------|--|---|

SAFETY & EMC TEST

SAFETY TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT |
|----|----------------------|-----------------------|------------------------------------|-----------------------------------|
| 1 | WITHSTAND VOLTAGE | I/P-O/P: 3.75KVAC/min | I/P-O/P: 4.125 KVAC/min Ta:25°C | I/P-O/P: 0.85 mA NO DAMAGE |
| 2 | ISOLATION RESISTANCE | I/P-O/P:500VDC>100MΩ | I/P-O/P: 500 VDC Ta:25°C | I/P-O/P: >99999MΩ NO DAMAGE |

E.M.C TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT |
|----|---|--|---|-----------------------------------|
| 1 | HARMONIC | EN61000-3-2 CLASS C | I/P: 230VAC/50HZ O/P:FULL LOAD Ta:25°C | PASS |
| 2 | CONDUCTION | EN55015 | I/P: 230 VAC (50HZ) O/P:FULL/50% LOAD Ta:25°C | PASS Test by certified Lab |
| 3 | RADIATION | EN55015 | I/P: 230 VAC (50HZ) O/P:FULL LOAD Ta:25°C | PASS Test by certified Lab |
| 4 | E.S.D | EN61000-4-2 AIR : 8KV / Contact : 4KV | I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C | CRITERIA A |
| 5 | E.F.T | EN61000-4-4 INPUT: 1KV | I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C | CRITERIA A |
| 6 | SURGE | IEC61000-4-5 L-N :1KV | I/P: 230 VAC/50HZ O/P:FULL LOAD Ta:25°C | CRITERIA A |
| 7 | Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report | | | |

■ RELIABILITY TEST

ENVIRONMENT TEST

| NO | TEST ITEM | SPECIFICATION | TEST CONDITION | RESULT | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|---|--|---|---|----|----------|-------------------------|------------------------|---|-----|--------|---------|---|-----|--------|--------|---|-----|--------|---------|---|----|--------|---------|---|----|--------|---------|---|------|---------|---------|---|------|--------|---------|---|------|--------|---------|---|------|--------|---------|----|------|--------|---------|----|------|--------|---------|----|------|--------|---------|----|------|--------|---------|----|------|--------|---------|----|------|--------|--------|----|------|--------|--------|----|----|--------|--------|
| 1 | TEMPERATURE RISE TEST | MODEL : XLN-60-12B 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=28.2 °C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=49.5 °C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | <table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=28.2 °C</th> <th>HIGH AMBIENT Ta=49.5°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>R37</td><td>70.9°C</td><td>100.4°C</td></tr> <tr><td>2</td><td>C20</td><td>73.7°C</td><td>95.7°C</td></tr> <tr><td>3</td><td>D10</td><td>75.2°C</td><td>108.8°C</td></tr> <tr><td>4</td><td>U1</td><td>81.0°C</td><td>102.4°C</td></tr> <tr><td>5</td><td>T1</td><td>87.0°C</td><td>103.1°C</td></tr> <tr><td>6</td><td>Q100</td><td>102.5°C</td><td>104.1°C</td></tr> <tr><td>7</td><td>C101</td><td>79.0°C</td><td>103.2°C</td></tr> <tr><td>8</td><td>Q110</td><td>87.0°C</td><td>105.6°C</td></tr> <tr><td>9</td><td>Q111</td><td>92.1°C</td><td>103.6°C</td></tr> <tr><td>10</td><td>R200</td><td>91.2°C</td><td>101.2°C</td></tr> <tr><td>11</td><td>L100</td><td>93.3°C</td><td>103.6°C</td></tr> <tr><td>12</td><td>U100</td><td>92.0°C</td><td>103.0°C</td></tr> <tr><td>13</td><td>U103</td><td>98.5°C</td><td>108.8°C</td></tr> <tr><td>14</td><td>U200</td><td>97.5°C</td><td>102.4°C</td></tr> <tr><td>15</td><td>U300</td><td>91.1°C</td><td>91.5°C</td></tr> <tr><td>16</td><td>RTH3</td><td>90.9°C</td><td>92.9°C</td></tr> <tr><td>17</td><td>TC</td><td>96.2°C</td><td>91.8°C</td></tr> </tbody> </table> | NO | Position | ROOM AMBIENT Ta=28.2 °C | HIGH AMBIENT Ta=49.5°C | 1 | R37 | 70.9°C | 100.4°C | 2 | C20 | 73.7°C | 95.7°C | 3 | D10 | 75.2°C | 108.8°C | 4 | U1 | 81.0°C | 102.4°C | 5 | T1 | 87.0°C | 103.1°C | 6 | Q100 | 102.5°C | 104.1°C | 7 | C101 | 79.0°C | 103.2°C | 8 | Q110 | 87.0°C | 105.6°C | 9 | Q111 | 92.1°C | 103.6°C | 10 | R200 | 91.2°C | 101.2°C | 11 | L100 | 93.3°C | 103.6°C | 12 | U100 | 92.0°C | 103.0°C | 13 | U103 | 98.5°C | 108.8°C | 14 | U200 | 97.5°C | 102.4°C | 15 | U300 | 91.1°C | 91.5°C | 16 | RTH3 | 90.9°C | 92.9°C | 17 | TC | 96.2°C | 91.8°C |
| NO | Position | ROOM AMBIENT Ta=28.2 °C | HIGH AMBIENT Ta=49.5°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | R37 | 70.9°C | 100.4°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | C20 | 73.7°C | 95.7°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | D10 | 75.2°C | 108.8°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | U1 | 81.0°C | 102.4°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | T1 | 87.0°C | 103.1°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | Q100 | 102.5°C | 104.1°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | C101 | 79.0°C | 103.2°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | Q110 | 87.0°C | 105.6°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | Q111 | 92.1°C | 103.6°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | R200 | 91.2°C | 101.2°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | L100 | 93.3°C | 103.6°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | U100 | 92.0°C | 103.0°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | U103 | 98.5°C | 108.8°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | U200 | 97.5°C | 102.4°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | U300 | 91.1°C | 91.5°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | RTH3 | 90.9°C | 92.9°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | TC | 96.2°C | 91.8°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | OVER LOAD BURN-IN TEST | NO DAMAGE 1 HOUR (MIN) | I/P : 230 VAC O/P : 160 % LOAD Ta : 25°C | TEST : OK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | LOW TEMPERATURE TURN ON TEST | TURN ON AFTER 2 HOUR | I/P : 305VAC/110VAC O/P : 100 % LOAD Ta=-30 °C | TEST : OK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST | AFTER 12 HOURS IN CHAMBER ON CONTROL 45 °C NO DAMAGE | I/P : 305 VAC O/P : FULL LOAD Ta=45 °C HUMIDITY= 95 %R.H | TEST : OK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | TEMPERATURE COEFFICIENT | ± 0.03 %/(0°C~50°C) | I/P : 230 VAC O/P : FULL LOAD | ± 0.014 %/°C(0~50°C) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | | |
|----|--------------------------|--|---|
| 6 | STORAGE TEMPERATURE TEST | -40~80°C | 1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10CYCLE 5. Input/output condition : STATIC TEST : OK |
| 7 | THERMAL SHOCK TEST | -25~45°C | 1. Thermal shock Temperature : -30°C~ +50°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test |
| 8 | VIBRATION TEST | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | 1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C |
| 9 | CAPACITOR LIFE CYCLE | SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Tc=75 °C LIFE TIME (2) I/P : 230VAC O/P : 75% LOAD Tc=75 °C LIFE TIME (3) I/P : 230VAC O/P : 50% LOAD Tc=75 °C LIFE TIME | (1) 36490HRS (2) 94743HRS (3) 163253HRS |
| 10 | MTBF | Conducted by Parts Stress Analysis Prediction 4053.7K hrs min. Telcordia SR-332 (Bellcore) ; 329.4K hrs min. MIL-HDBK-217F (25°C) | |
| 11 | Ongoing Reliability Test | I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours | |

| TEST RESULT | TESTER | REVIEW | APPROVAL |
|-------------|--------------|--------|----------|
| PASS | WUWQ/HUANGMK | WENF | LINKX |

2020.10.1 TAG-QA-009